

LUMINOUS ARK LED FLOOD LIGHT

FEATURES

- High efficiencies 112-140 lm/W
- Photocel available
- 347- 480 vault available on some models

APPLICATIONS

- Commercial
- Factories
- Industrial Zones



info@bcledonline.com bcledonline.com 250-718-8100

PRODUCT SPECIFICATIONS

CRI (ra)	>70
Rated Life (Hours)	50,000+
Warranty	5 Years
Certification	UL, cUL, DLC
Operating Temperature	-4°F - 113°F
IP Rating	65

ORDERING INFORMATION


EXAMPLE: ARK-02-120W-UNV-50KT2-LB

Model	Series	Wattage	Voltage	Color Temperature	Optics	Mounting
ARK	02	120W (15,887 lm, 132 lm/W) 120W (15,651lm, 130 lm/W) 150W (21,066 lm, 140 lm/W) 150W (21,005 lm, 140 lm/W) 185W (24,408 lm, 132 lm/W) 240W (32,108 lm, 134 lm/W) 300W (41,099 lm, 135 lm/W)	UNV (120v-277v) 480 (347v-480v)	40K (4000K) 50K (5000K STD) 57K (5700K)	T2 (Type II)	SB (Short Yoke Bracket) LB (Long Yoke Bracket)


*Bold options denote 347v-480v availability.




120W BRACKET

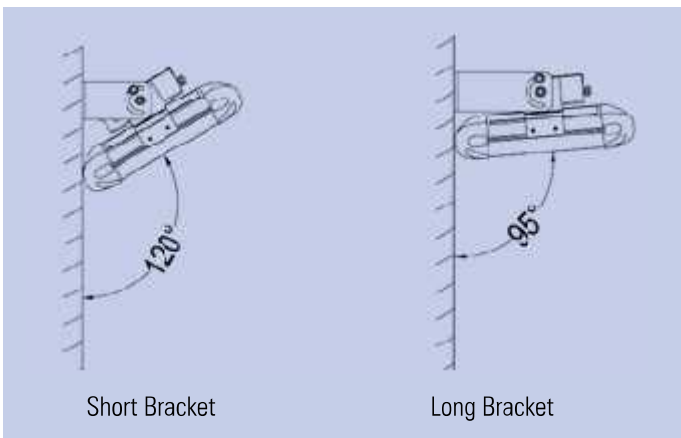


240W BRACKET

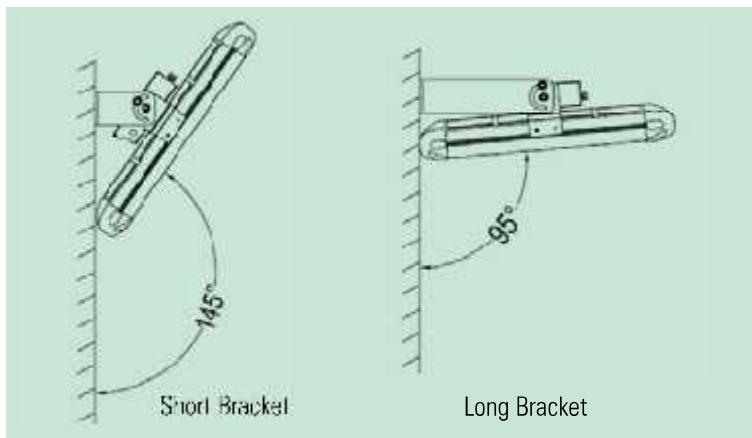

150W BRACKET

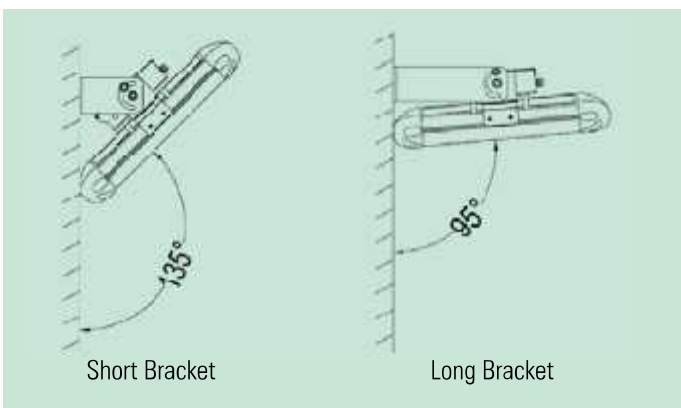

Dimensions

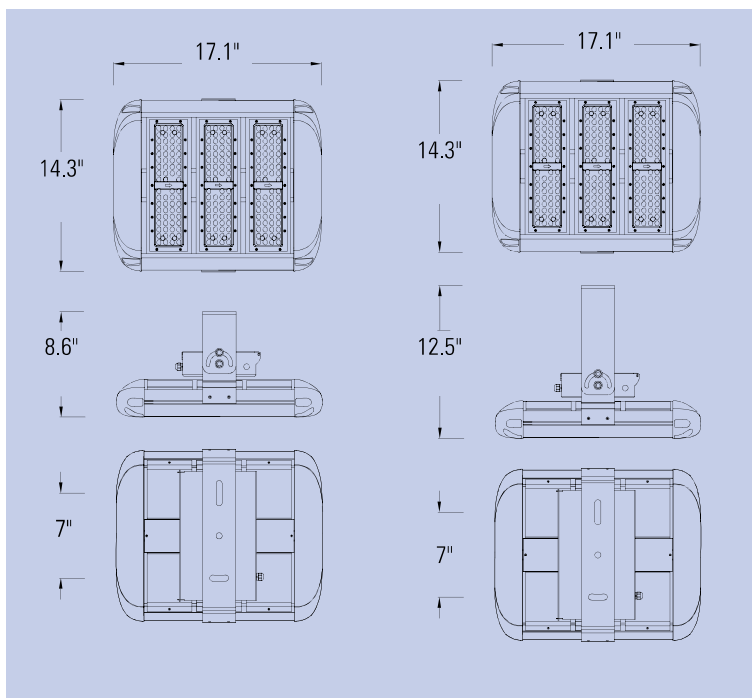

185W BRACKET

