



Efficiency Savings Reliability

info@bcledonline.com bcledonline.com 250-718-8100

WALL PACK 2

CLASS I LUMINAIRE | IP66






SPECIFICATIONS

Class I Luminaire
 IP66 - Suitable for Wet Locations
 Robust Die-Cast Aluminium Casing
 Shatter Resistant Poly-Carbonate Lens
 Colour Rendering Index: >75
 Functioning Temperature: -40°C to 50°C

AVAILABILITY

45W / 70W
 4000K / 5000K
 120-277VAC / 347V

This is a STOCK item:
 Look for our Same Day Shipping icon for
 all products that ship out on the same day
 (orders must be placed before 3pm EST)

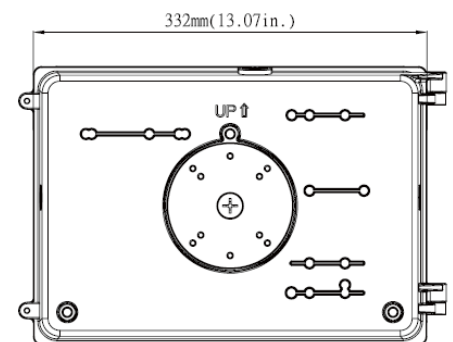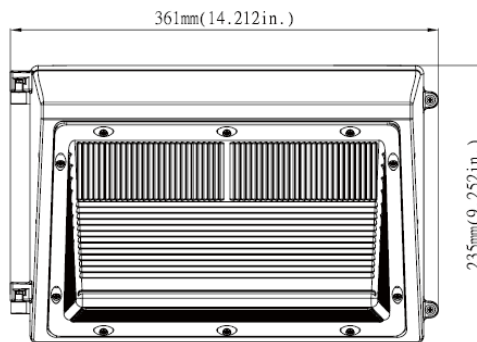

ORDERING INFORMATION

SERIES	POWER (WATTS)	EQUIVALENT TO (WATTS)	LUMENS	LED QTY	COLOR TEMP	INPUT VOLTAGE	MODEL NUMBER
WALL PACK 2 VERSION 1	45	100	5300	15	4000K	120-277VAC	WP2-40K-V1
						347V	WP2-40K-V1-347V
					5000K	120-277VAC	WP2-50K-V1
						347V	WP2-50K-V1-347V
WALL PACK 2 VERSION 2	70	120	8100	30	4000K	120-277VAC	WP2-40K-V2
						347V	WP2-40K-V2-347V
					5000K	120-277VAC	WP2-50K-V2
						347V	WP2-50K-V2-347V



Efficiency Savings Reliability

info@bcledonline.com bcledonline.com 250-718-8100

