



# 60W Direct Lit Vapour Proof

Ideal for parking structures, welding cells, paint lines, and parts inspections  
Suitable for damp/wet locations or wherever a high impact-resistant fixture is required

Corrosion-, flame-, and vandal-resistant



Top grade UV stabilized  
Bayer Makrolon polycarbonate  
construction

Ultra-low V2  
flammability rating



4 rows of Samsung SMD LEDs  
ensures incredibly low glare  
and high thermal management

0-10V dimmable  
Optional motion sensor available

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

|             |          |
|-------------|----------|
| Lumens      | 7,500 lm |
| Efficacy    | 125 lm/W |
| CCT         | 5000K    |
| Beam angle  | N/A      |
| CRI         | 80       |
| Dimmable    | Yes      |
| Rated hours | 50,000   |
| Warranty    | 5-year   |

### APPROVALS AND LISTINGS

|     |              |
|-----|--------------|
| cUL | E482965      |
| DLC | PL0Z8AFB267C |

### DIMENSIONS

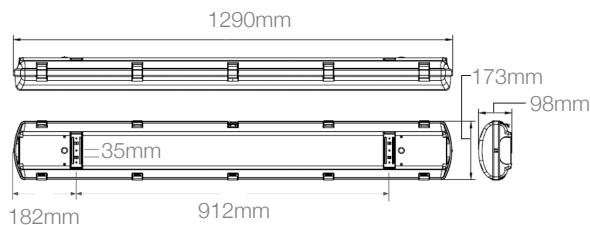

51"x13"x15"

### ELECTRICAL

|                |             |
|----------------|-------------|
| Wattage        | 60W         |
| Voltage        | 120-277V    |
| Power factor   | 0.95        |
| THD            | 10%         |
| Operating temp | -40 to 40°C |

### CONSTRUCTION

|            |               |
|------------|---------------|
| Housing    | Polycarbonate |
| Colour     | Grey          |
| IP rating  | IP65          |
| Length     | 4 feet        |
| Weight     | 8 lbs         |
| Carton qty | 6             |

